

PROTECTIVE WORK GLOVES

www.egebant.com.tr



egebant®

www.egebant.com.tr

Rich Heritage, Strong Future



Since

1969



+56

Years of
Experience



+50

Sales
Specialist



+75

Dealer
Network



2

Manufacturing
Plants



1

R&D
Center



+

650

Total
Employees

egēbant

Kocaeli
Headquarter and
Factory

egēbant

Şanlıurfa
Factory



egēbant

Global Export
Network



3

Continents

30

Countries

www.egebant.com.tr

Şanlıurfa Factory



Kocaeli Factory & Headquarter



ABOUT US

Egebant was established in Karaköy in 1969. With its sustainable solutions, Egebant prioritises customer satisfaction at the highest level and aims to be the permanent solution partner of its customers and stakeholders. In line with this mission, it has been collaborating with globally recognised brands for many years.

Accordingly, Egebant brings the products of globally strong brands such as 3M, Honeywell, Klingspor, Naxoflex, Dynabrade, and Sicad to the Turkish market.

Guided by its core values of trustworthiness, innovation, sincerity, courage, and participation, Egebant builds long-term, trust-based relationships with its customers and stakeholders while developing flexible, tailored solutions for them.

By leveraging its manufacturing experience, which it has gained through providing services to many industry-leading brands—from the automotive sector to home appliances—Egebant continues to expand its product range with its brands, Egebant and Sander, while making investments in line with market needs.

With over 650 employees, more than 50 active sales specialists, and a widespread dealer network across Turkey, Egebant operates manufacturing facilities in Şekerpınar, Kocaeli, and Şanlıurfa. The company exports to more than 30 countries across three continents, primarily in Europe, offering a diverse range of products for various industries.

Through its customer-centric approach, Egebant conducts research and development (R&D) activities to create innovative solutions that generate value for all its customers and stakeholders.

As part of its environmental policy, Egebant effectively manages the inputs of its production processes and energy resources, developing methods to increase energy efficiency, reduce waste, and prevent pollution.

With a commitment to environmental sustainability, the company has launched a Zero Waste Project in its facilities, ensuring waste separation at the source to minimise environmental risks. Additionally, Egebant is expanding its expertise in green energy through its recycling facilities.


Moreover, to contribute to the reduction of emissions and the development of a renewable energy system, Egebant plans to generate a significant portion of the energy it consumes at its Şanlıurfa production facility through a rooftop solar power plant.

For 56 years, Egebant has been successfully growing its brands and reputation with the vision of becoming a global leader, continuously producing sustainable solutions and creating lasting value for all its stakeholders.

Finding the Right Gloves is Now Effortless!

Easily find the gloves you are looking for by using the Glove Selector on egebant.com.tr, powered by an algorithm that simplifies glove selection for various industries and needs.

The best protection is in your hands with the fastest selection!

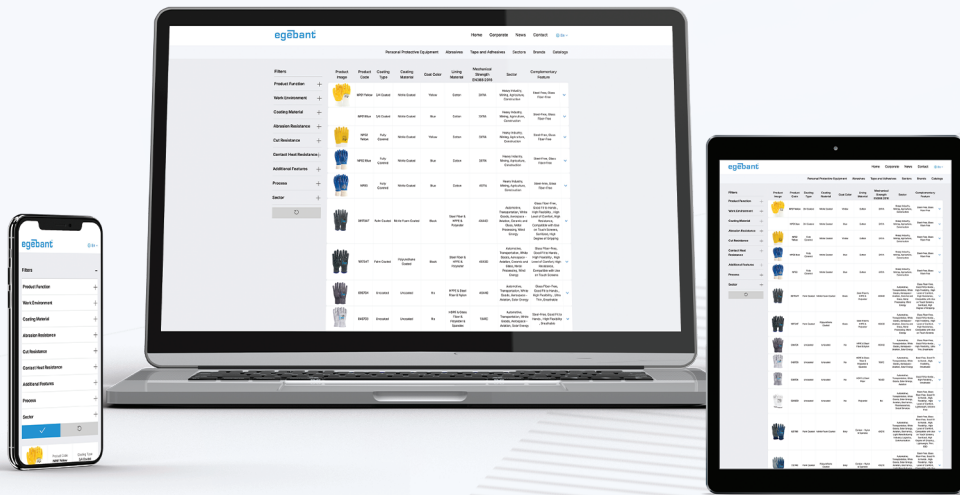

1



Scan the QR code

2



Select the
Filters You Want!

3



View the Gloves
That Match
Your Needs



SCAN THE QR CODE



TABLE OF CONTENTS



Personal Protective Equipment

About Us.....3

Glove Catalog Index8-11

PU-Coated Cut-Resistant Gloves..... 12-17

Nitrile Foam-Coated Cut-Resistant Gloves 18-22

Uncoated Gloves23

Special-Purpose Gloves24

Nitrile Foam-Coated Assembly Gloves..... 25-28

EcoCycle Gloves29

Oil-Resistant Work Gloves30

PU-Coated Precision Assembly Gloves 31-34

Uncoated34

General Work Gloves35

Glove Standards..... 36-39

Types of Glove Coatings 40-41



egebant

CE
3 3 1 3 3 4
SanCut
EN 388
EN 389
EN 10620
EN 10819



PROTECTIVE WORK GLOVES

Glove Catalog Index

	Product Code	Standard	Coating Type	Liner Material	Coating Material	Size	Colour	Packaging Info	Page No
PU-Coated Cut-Resistant Gloves	101744	EN388: 4X42D EN407: X1XXXX	½ Coated	HPPE & Steel Fiber & Polyester & Cotton	Polyurethane	6,7,8,9,10,11	Lining White - Black & Yellow Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	12
	131242	EN388: 4X42B EN407: X1XXXX	½ Coated	HDPE & Glass Fiber & Polyester	Polyurethane	7,8,9,10,11	Lining Grey, Coating White	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	12
	131742	EN388: 4X42B EN407: X1XXXX	½ Coated	HDPE & Glass Fiber & Polyester	Polyurethane	7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	13
	131744	EN388: 4X42D EN407: X1XXXX	½ Coated	HDPE & Steel Fiber & Polyester	Polyurethane	7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	13
	141243	EN388: 4X31A	½ Coated	HDPE & Glass Fiber & Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	14
	141743	EN388: 4X43C	½ Coated	HDPE & Glass Fiber & Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	14
	141745	EN388: 4X43E	½ Coated	HPPE & Glass Fiber & Steel Fiber & Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	14
	181242	EN388: 4X42B	½ Coated	Dyneema Diamond & Polyamide	Polyurethane	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	15
	181743	EN388: 4X43C	½ Coated	Dyneema Diamond & Polyamide	Polyurethane	6,7,8,9,10,11	Lining Blue & White Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	15
	191732	EN388: 4X43B	½ Coated	HPPE & Steel Fiber & Polyester	Polyurethane	6,7,8,9,10,11	Lining Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	16
	191733	EN388: 4X43C	½ Coated	HPPE & Steel Fiber & Polyester	Polyurethane	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	16
	191734	EN388: 4X43D	½ Coated	HPPE & Steel Fiber & Polyester	Polyurethane	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	16
	191734T	EN388: 4X43D	½ Coated	HPPE & Steel Fiber & Polyester	Polyurethane	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	17
	191746	EN388: 3X42F	½ Coated	HPPE & Glass Fiber & Steel Fiber & Polyamide	Polyurethane	6,7,8,9,10,11	Lining Black & White Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	17

Glove Catalog Index

	Product Code	Standard	Coating Type	Liner Material	Coating Material	Size	Colour	Packaging Info	Page No
Nitrile Foam-Coated Cut-Resistant Gloves	301735	EN388: 4X21E EN407: X1XXXX+ C17:C18	½ Coated	HPPE & Steel Fiber & Polyester & Cotton	Foam Nitrile	6,7,8,9,10,11	Lining White - Black & Yellow Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	18
	331334	EN388: 4X42D EN407: X1XXXX	½ Coated	HDPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining White & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	18
	331732	EN388: 4X41B EN407: X1XXXX	½ Coated	HDPE & Glass Fiber & Polyester	Foam Nitrile	7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	19
	331734	EN388: 4X42D EN407: X1XXXX	½ Coated	HDPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Black & White, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	19
	341734	EN388: 4X42D	½ Coated	HPPE & Glass Fiber & Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Navy Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	19
	351734	EN388: 4X31D EN407: X1XXXX	½ Coated	Steel Fiber & Aramid & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Yellow & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	20
	381632	EN388: 4X42B	½ Coated	Dyneema Diamond & Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	20
	381633	EN388: 4X42C	½ Coated	Dyneema Diamond & Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Navy Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	21
	391732	EN388: 4X43B	½ Coated	Dyneema Diamond & Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	21
	391733	EN388: 4X43C	½ Coated	HPPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	21
	391734	EN388: 4X44D	½ Coated	HPPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	22
	391734T	EN388: 4X44D	½ Coated	HPPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	22
Uncoated Gloves	030704	EN388: 1X42D EN407: X1XXXX	Uncoated	HDPE & Steel Fiber	Uncoated	7,8,9,10,11	Lining Black & White	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	23
	040703	EN388: 1X41C EN407: X1XXXX	Uncoated	HDPE & Glass Fiber & Polyester & Spandex	Uncoated	7,8,9,10,11	Lining Black & White Melange	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	23
	050103	EN388: 1X43C EN407: X1XXXX	Uncoated	Aramid & Glass Fiber & Flame-Resistant Acrylic	Uncoated	6,7,8,9,10,11	Lining Yellow	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	23

Glove Catalog Index

	Product Code	Standard	Coating Type	Liner Material	Coating Material	Size	Colour	Packaging Info	Page No
Special-Purpose Gloves	096704	EN388: 4X44D	Uncoated	HPPE & Steel Fiber & Polyamide	Uncoated	6,7,8,9,10,11	Lining Black & White Melange	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	24
	196734	EN388: 4X42D	½ Coated	HPPE & Steel Fiber & Polyester	Polyurethane	6,7,8,9,10,11	Lining Black & White Melange	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	24
	396734	EN388: 4X44D	½ Coated	HPPE & Steel Fiber & Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	24
Nitrile Foam-Coated Assembly Gloves	371731	EN388: 4X31A EN407: X1XXXX	½ Coated	Polyamide & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Grey & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	25
	521530	EN388: 3X31A EN407: X1XXXX	½ Coated	Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Red, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	26
	521731	EN388: 4X31A EN407: X1XXXX	½ Coated	Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	27
	571241	EN388: 4X31A EN407: X1XXXX	½ Coated	Polyamide & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	27
	571331	EN388: 4131A EN407: X1XXXX	½ Coated	Polyamide & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Black, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	27
	571431	EN388: 4X31A EN407: X1XXXX	½ Coated	Polyamide & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Grey, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	28
	571731	EN388: 4X21X EN16350: ESD	½ Coated	Polyamide & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Grey & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	28
	821740	EN388: 4X44D	½ Coated	Carbon - Polyamide & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Blue & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	28
EcoCycle Gloves	317330	EN388: 4X21X	½ Coated	Recycled Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	29
	377731	EN388: 4X31A	½ Coated	Recycled Nylon & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	29

Glove Catalog Index

	Product Code	Standard	Coating Type	Liner Material	Coating Material	Size	Colour	Packaging Info	Page No
Oil-Resistant Work Gloves	SanSeal 442460	EN388: 4121X	¾ Coated	Polyester	Nitrile	7,8,9,10,11	Lining Grey & Coating Blue & Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	30
	SanSeal 443460	EN388: 4121X	Fully Coated	HPPE	Nitrile	7,8,9,10,11	Lining Grey & Coating Blue & Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	30
	SanSeal 443464	EN388: 4X42D	Fully Coated	Polyester	Nitrile	7,8,9,10,11	Lining Grey & Coating Blue & Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	30
PU-Coated Precision Assembly Gloves	111220	EN388: 3X21X	½ Coated	Polyester	Polyurethane	6,7,8,9,10,11	Lining Grey & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	31
	111330	EN388: 3X21X	½ Coated	Polyester	Polyurethane	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	31
	121220	EN388: 4X31X	½ Coated	Polyamide	Polyurethane	6,7,8,9,10,11	Lining Black, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	32
	121330	EN388: 4X31X	½ Coated	Polyamide	Polyurethane	6,7,8,9,10,11	Lining Grey, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	32
	121440	EN388: 4X31X	½ Coated	Polyamide	Polyurethane	6,7,8,9,10,11	Lining Red, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	32
	161330	EN388: 3X21X	½ Coated	Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	33
	166330	EN388: 1010X	½ Coated	Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining Black, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	33
	721740	EN388: 4X21X EN16350 ESD	½ Coated	Carbon - Polyamide & Spandex	Polyurethane	6,7,8,9,10,11	Lining Grey, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	34
Uncoated	020200	—	Uncoated	Polyamide	Uncoated	6,7,8,9,10	Lining White	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	34
General Work Gloves	NP01 Yellow	EN388: 3X11A	¾ Coated	Cotton	Nitrile	8,9,10	Lining Ecru, Coating Blue	1st Option (Size 9 and 10) Pairs per Pack 12 Packs per Carton 24 Total Contents per Carton 288 2nd Option (Size 8, 9, and 10) Individual Packaging Total Contents per Carton 200	35
	NP01 Blue	EN388: 3X11A	¾ Coated	Cotton	Nitrile	8,9,10	Lining Ecru, Coating Yellow	1st Option (Size 9 and 10) Pairs per Pack 12 Packs per Carton 24 Total Contents per Carton 288 2nd Option (Size 8, 9, and 10) Individual Packaging Total Contents per Carton 200	35
	NP02 Yellow	EN388: 3X11A	Fully Coated	Cotton	Nitrile	8,9,10	Lining Ecru, Coating Blue	Individual Packaging Total Contents per Carton 200 (Sizes 9 and 10)	35
	NP02 Blue	EN388: 3X11A	Fully Coated	Cotton	Nitrile	8,9,10	Lining Grey, Coating Black	Individual Packaging Total Contents per Carton 200 (Sizes 9 and 10)	35
	NP03 Blue	EN388: 4111A	Fully Coated	Cotton	Nitrile	9,10,11	Lining Ecru, Coating Blue	Individual Packaging Total Contents per Carton 200 (Sizes 9 and 10)	35

SanCut Series

PU-Coated Cut-Resistant Gloves

General Properties

It is produced by coating PU on a thin and heat-resistant HPPE fiber and polyester blend lining. TDM 100 provides D level cut resistance according to ISO 13997 test. It provides a better grip on dry and slightly oily parts compared to bare hands. It is suitable for working with hot parts (100 °C contact temperature) as well as for applications where protection against the risk of cuts is required.

Areas of Usage

Metalworking, working with heavy parts, working with sheet metal, production and assembly lines, steel wire applications.

SanCut 101744



D
CUT

 High Resistance

CE

EN 21420

EN 407

 X1XXXX

EN 388:2016

 4X42D

Coating	Polyurethane
Coating Colour	Grey
Liner	Steel Fiber & HPPE & Polyester & Cotton
Liner Colour	White-Black & Yellow Melange
Gauge	13G
Thickness	1,15 mm
Size	6,7,8,9,10,11



Check it Now



General Properties

Precision working gloves; reinforced, resistant to cuts, made of twisted filament fiber, and suitable for general usage.

Areas of Usage

General handling, working with metal pieces, assembly and production lines, working with metal plates, working with sheet metal materials.

SanCut 131242



B
CUT

 High Resistance

CE

EN 420


EN 407

 X1XXXX

EN 388:2016

 4X42B

Coating	Polyurethane
Coating Colour	Grey
Liner	Glass Fiber & HPPE & Polyester
Liner Colour	White
Gauge	15G
Thickness	1,00 mm
Size	7,8,9,10,11



Check it Now



PU-Coated Cut-Resistant Gloves

General Properties

A cut-resistant work glove designed to withstand abrasive materials thanks to its extra-durable PU coating. Its discontinuous fiber structure allows for a secure grip on hard objects without creating pressure on the hand.

Areas of Usage

General handling, working with metal parts, material transport, rough assembly, heavy material handling.

SanCut 131742



B
CUT



EN 420

EN 407



X1XXXX

EN 388:2016



4X42B

Coating	Polyurethane
Coating Colour	Grey
Liner	Glass Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	15G
Thickness	1,00 mm
Size	7,8,9,10,11



Check it Now



SanCut 131744



D
CUT



EN 21420

EN 407



X1XXXX

EN 388:2016



4X42D

Coating	Polyurethane
Coating Colour	Grey
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	7,8,9,10,11



Check it Now



SanCut Series

PU-Coated Cut-Resistant Gloves

General Properties

Precision working gloves; reinforced, resistant to cuts, made of twisted filament fiber, and suitable for general usage.

Areas of Usage

General handling, working with metal pieces, assembly and production lines, working with metal plates, working with sheet metal materials.

SanCut 141243



Coating	Polyurethane
Coating Colour	Grey
Liner	Glass Fiber & HPPE & Polyester & Spandex
Liner Colour	White
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11



SanCut 141743




Coating	Polyurethane
Coating Colour	Grey
Liner	Glass Fiber & HPPE & Polyester & Spandex
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11



SanCut 141745



Coating	Polyurethane
Coating Colour	Grey
Liner	HPPE & Glass Fiber & Steel Fiber & Polyester & Spandex
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11



PU-Coated Cut-Resistant Gloves

General Properties

Thanks to Dyneema Diamond Technology; light weight, comfortable durable and highly flexible cut resistant gloves.

Areas of Usage

General handling, working with metal pieces, light assembly and production lines, working with metal or plastic plates, working with sheet metal materials.

SanCut 181242



- Ultra Lightweight
- Thin
- Steel-Free
- Glass Fiber Free
- Moderate Resistance
- High Flexibility
- Good Fit for Hands
- High Level of Comfort

Coating	Polyurethane
Coating Colour	Grey
Liner	Dyneema Diamond & Nylon
Liner Colour	White
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviation
- Metal Processing
- Electronics
- Packaging

SanCut 181743



- Ultra Lightweight
- Thin
- Steel-Free
- Glass Fiber Free
- Moderate Resistance
- High Flexibility
- Good Fit for Hands
- High Level of Comfort

Coating	Polyurethane
Coating Colour	Grey
Liner	Dyneema Diamond & Nylon
Liner Colour	Blue & White Melange
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviation
- Metal Processing
- Electronics
- Packaging

SanCut Series

PU-Coated Cut-Resistant Gloves

General Properties

High fingertip sensitivity cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.

Areas of Usage

General handling, working with metal pieces, light assembly and production lines, working with metal or plastic plates, working with sheet metal materials.

SanCut 191732



Thin



Moderate Resistance



Good Fit for Hands



Compatible with Touch Screens



High Flexibility



Glass Fiber Free



High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Blue & White Melange
Gauge	18G
Thickness	0,70 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Furniture



Electronics



Plastic



Communication

SanCut 191733



Thin



Moderate Resistance



Good Fit for Hands



Compatible with Touch Screens



High Flexibility



Glass Fiber Free



High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,70mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Furniture



Electronics



Plastic



Communication

SanCut 191734



Thin



Moderate Resistance



Good Fit for Hands



Compatible with Touch Screens



High Flexibility




Glass Fiber Free



High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,75mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Furniture



Electronics



Plastic



Communication

PU-Coated Cut-Resistant Gloves

SanCut 191734T



- Thin
- High Resistance
- Good Fit for Hands
- Compatible with Touch Screens
- High Flexibility
- Glass Fiber Free
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	15G
Thickness	0,80 mm
Size	6,7,8,9,10,11



Check it Now

- Automotive
- Transportation
- White Goods
- Aviation
- Ceramic and Glass
- Metal Processing
- Wind Energy

SanCut 191746




- Thin
- Moderate Resistance
- Good Fit for Hands
- Compatible with Touch Screens
- High Flexibility
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Grey
Liner	Steel Fiber & HPPE & Glass Fiber & Nylon
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviation
- Metal Processing
- Furniture
- Electronics
- Plastic
- Communication

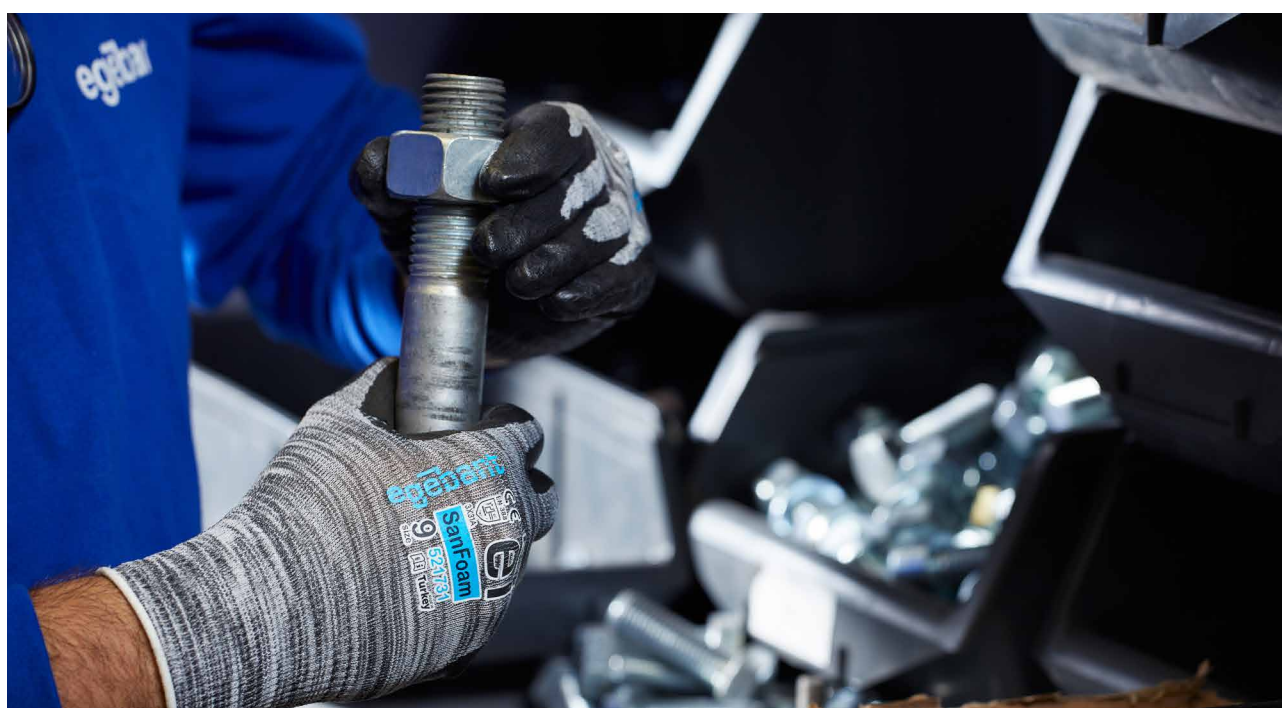

SanCut Series

Nitrile Foam-Coated Cut-Resistant Gloves


General Properties

It is produced by coating Foam Nitrile on a cut, abrasion and heat-resistant, HPPE fiber and polyester blend lining. TDM 100 provides E level cut resistance according to ISO 13997 test. It makes it easier to hold dry and less oily parts compared to holding with bare hands. It is suitable for working with hot parts (100 °C contact temperature) as well as for applications where protection against the risk of cuts is required.

Areas of Usage

Metalworking, working with heavy parts, working with sheet metal, production and assembly lines, steel wire applications.

SanCut 301735



High Resistance

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester & Cotton
Liner Colour	White-Black & Yellow Melange
Gauge	13G
Thickness	1,35 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Aviation



Metal Processing



Wind Energy



Ceramic and Glass


General Properties

Suitable for dry and slightly oily environments with a risk of cuts. Offers a comfortable working opportunity as it has a thin structure and fits well hands.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.

SanCut 331334



High Resistance



High Degree of Gripping



Compatible with Touch Screens



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Ceramic and Glass



Light Manufacturing Industry



Aviation



Metal Processing



Construction

Nitrile Foam-Coated Cut-Resistant Gloves

SanCut 331732



B
CUT



EN 420

EN 407



X1XXXX

EN 388



4X41B



High Resistance



High Degree of Gripping



Compatible with Touch Screens



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Glass Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Ceramic and Glass



Light Manufacturing Industry



Logistics



Aviation



Metal Processing

SanCut 331734



D
CUT



EN 420

EN 407:2004



X1XXXX

EN 388:2016



4X42D

EN 16350



High Resistance



High Degree of Gripping



Compatible with Touch Screens



ESD



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Construction



Aviation



Ceramic and Glass



Metal Processing



Light Manufacturing Industry

General Properties

It is made by double-layer knitting of reinforced cut-resistant continuous filament fiber and a specially designed cut-resistant fiber. This provides extra durability in cut protection. It offers high grip and excellent mobility.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.

SanCut 341734



D
CUT



EN 420

EN 388:2016



4X42D



High Resistance



High Degree of Gripping



Good Fit for Hands



High Flexibility



Metal-Free



Compatible with Touch Screens



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	HPPE & Glass Fiber & Nylon
Liner Colour	Navy Blue & White Melange
Gauge	18G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Furniture



Ceramic and Glass



Plastic

SanCut Series

Nitrile Foam-Coated Cut-Resistant Gloves

General Properties

Combination of foam nitrile coating that has a higher degree of gripping, with aramid knit that is thin and resistant to heat and cuts.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.

SanCut 351734



EN 420

EN 407:2004



X1XXXX

EN 388:2016



4X31D



High Resistance



High Degree of Gripping



Good Fit for Hands



High Flexibility




Compatible with Touch Screens



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & Aramid & Polyester
Liner Colour	Yellow & Black Melange
Gauge	15G
Thickness	1,10 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Aviation



Metal Processing



Furniture



Ceramic and Glass



Solar Energy



Wind Energy

General Properties

Precision working gloves; made of dyneema liner, light, comfortable, durable and allowing for maximum mobility, higher degree of gripping, resistant to cuts.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.

SanCut 381632



EN 420

EN 388:2016



4X42B



Ultra Lightweight



Thin



Steel-Free



Glass Fiber Free



High Degree of Gripping



Good Fit for Hands



High Flexibility




High Level of Comfort



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Dyneema Diamond & Nylon
Liner Colour	Blue & White Melange
Gauge	18G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Electronics



Packaging

Nitrile Foam-Coated Cut-Resistant Gloves

SanCut 381633



- Ultra Lightweight
- Thin
- Steel-Free
- Glass Fiber Free
- High Degree of Gripping
- Good Fit for Hands
- High Flexibility
- High Level of Comfort
- Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Dyneema Diamond & Nylon
Liner Colour	Navy Blue & White Melange
Gauge	18G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check It Now

- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviation
- Metal Processing
- Electronics
- Packaging

General Properties

High grip cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.

SanCut 391732



- Thin
- Moderate Resistance
- Good Fit for Hands
- Compatible with Touch Screens
- High Flexibility
- Glass Fiber Free
- High Level of Sensitivity for Fingertips
- High Degree of Gripping
- ESD

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Blue & White Melange
Gauge	18G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check It Now

- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviation
- Electronics
- Logistics

SanCut 391733



- Thin
- Moderate Resistance
- Good Fit for Hands
- Compatible with Touch Screens
- High Flexibility
- Glass Fiber Free
- High Level of Sensitivity for Fingertips
- High Degree of Gripping

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check It Now

- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviation
- Electronics
- Metal Processing

SanCut Series

Nitrile Foam-Coated Cut-Resistant Gloves

SanCut 391734



EN 420
EN 388:2016
4X44D



Thin



High Resistance



Good Fit for Hands



Compatible with Touch Screens



High Flexibility



Glass Fiber Free



High Level of Sensitivity for Fingertips



High Degree of Gripping

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,95 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Plastic



Ceramic and Glass

SanCut 391734T



EN 420
EN 388:2016
4X44D



Thin



High Resistance



Good Fit for Hands



Compatible with Touch Screens



High Flexibility



Glass Fiber Free



High Level of Sensitivity for Fingertips



High Degree of Gripping

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Automotive



Transportation



White Goods



Aviation



Ceramic and Glass



Metal Processing



Wind Energy



General Properties

Gloves lining manufactured using cut resistant threads.
High level of flexibility and permeability.

Areas of Usage

Surface control treatments, general usage,
special applications

SanCut 030704



EN 420

EN 407



X1XXXX

EN 388:2016



1X42D



Breathable



High Level of Comfort



Good Fit for Hands

Coating Uncoated

Liner Steel Fiber & HPPE

Liner Colour Black & White Melange

Gauge 13G

Thickness 0,80 mm

Size 7,8,9,10,11



Check It Now



Automotive



Transportation



White Goods



Aviation



Solar Energy

SanCut 040703



EN 420

EN 407



X1XXXX

EN 388:2016



1X41C



Breathable



High Level of Comfort



Good Fit for Hands

Coating Uncoated

Liner Glass Fiber& Polyester & Spandex & HPPE

Liner Colour Black & White Melange

Gauge 13G

Thickness 0,80 mm

Size 7,8,9,10,11



Check It Now



Automotive



Transportation



White Goods



Aviation



Solar Energy

SanCut 050103



EN 21420

EN 407



X1XXXX

EN 388:2016



1X43C



Breathable



High Level of Comfort



Good Fit for Hands

Coating Uncoated

Liner Aramid & Glass Fiber& Flame Resistant Acrylic

Liner Colour Yellow

Gauge 13G

Thickness 1,03 mm

Size 6,7,8,9,10,11



Check It Now



Automotive



Transportation



White Goods



Aviation



Solar Energy

SanCut Series

Special-Purpose Glove

General Properties

Glove liners manufactured using cut resistant threads, with finger bottoms softened. These gloves offer a level D cut-resistance, and the finger sections are easily removable. This ensures that the finger sections are easily removed when being caught while working.

Areas of Usage

Surface control treatments, general usage, special applications.

SanCut 096704



EN 420
EN 388:2016
4X44D



Coating	Uncoated
Liner	HPPE & Steel Fiber & Nylon
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,60 mm
Size	6,7,8,9,10,11



Check it Now



SanCut 196734



EN 21420
EN 388:2016
4X42D



Coating	Polyurethane
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now




SanCut 396734



EN 21420
EN 388:2016
4X44D



Coating	Foam Nitrile
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	1,10 mm
Size	6,7,8,9,10,11



Check it Now



Nitrile Foam-Coated Assembly Gloves


General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

Areas of Usage


General handling, packaging, material handling, light assembly and production lines, light maintenance.

SanFoam 371731



- High Resistance
- High Level of Comfort
- High Degree of Gripping
- Good Fit for Hands
- Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon & Spandex
Liner Colour	Grey & Black Melange
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Automotive
- Transportation
- Logistics
- Textile
- Furniture
- Aviationspace - Aviation
- Plastic
- Packaging



SanFoam Series

Nitrile Foam-Coated Assembly Gloves

General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance.

SanFoam 521530



EN 420

EN 407



EN 388



Thin



High Degree of Gripping



High Level of Comfort



High Resistance



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon
Liner Colour	Red
Gauge	15G
Thickness	0,80 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Logistics



Furniture



Textile



Plastic

SanFoam 521731



EN 21420

EN 407



EN 388



Lightweight



High Degree of Gripping



High Level of Comfort



Moderate Resistance



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon
Liner Colour	Black & White Melange
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Logistics



Textile



Furniture



Aviation -
Aviation



Plastic



Packaging

Nitrile Foam-Coated Assembly Gloves

General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, light maintenance.

SanFoam 571241



High Resistance



High Level of Comfort



High Degree of Gripping




Good Fit for Hands



Sanitized

Coating	Foam Nitrile
Coating Colour	Grey
Liner	Nylon & Spandex
Liner Colour	White
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



Logistics



Textile



Furniture



Aviation - Aviation



Plastic



Packaging

SanFoam 571331



High Resistance



High Level of Comfort



High Degree of Gripping




Good Fit for Hands



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon & Spandex
Liner Colour	Black
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



Logistics



Textile



Furniture



Aviation - Aviation



Plastic



Packaging

SanFoam Series

Nitrile Foam-Coated Assembly Gloves

SanFoam 571431



EN 21420

EN 407



EN 388



High Resistance



High Level of Comfort



High Degree of Gripping




Good Fit for Hands



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon & Spandex
Liner Colour	Grey
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



Logistics



Textile



Furniture



Aviation - Aviation



Plastic



Packaging

SanFoam 571731



EN 21420

EN 407



EN 388



High Resistance



High Level of Comfort



High Degree of Gripping



Good Fit for Hands



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon & Spandex
Liner Colour	Grey & Black Melange
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



Logistics



Textile



Furniture



Aviation - Aviation



Plastic



Packaging

General Properties

Electrostatic discharge protection featured carbon lining, ESD-certified, touch screens compatible.

Areas of Usage

Assembly of electrical/electronic components, light assembly and production lines, environments, requiring ESD protection, general handling, light maintenance.

SanFoam 821740



EN 21420

EN 388:2016



EN 16350



Lightweight



High Resistance



Compatible with Touch Screens



ESD



Good Fit for Hands



High Level of Comfort




High Level of Sensitivity for Fingertips



High Degree of Gripping

Coating	Foam Nitrile
Coating Colour	Grey
Liner	Carbon- Nylon & Spandex
Liner Colour	Blue & Black Melange
Gauge	18G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Solar Energy



Logistics



Electronics



Communication

General Properties

General usage gloves made with recycled yarn; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance.

EcoCycle 317330



- High Resistance
- High Level of Comfort
- High Degree of Gripping
- Good Fit for Hands
- Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Recycle Polyester
Liner Colour	Black
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Automotive
- Transportation
- Logistics
- Textile
- Furniture
- Aviationspace - Aviation
- Plastic
- Packaging

EcoCycle 377731



- High Resistance
- High Level of Comfort
- High Degree of Gripping
- Good Fit for Hands
- Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Recycle Nylon & Spandex
Liner Colour	Green & Black Melange
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Automotive
- Transportation
- Logistics
- Textile
- Furniture
- Aviationspace - Aviation
- Plastic
- Packaging

SanSeal Series

Oil-Resistant Work Gloves

General Properties

Double-layer fully coated nitrile work glove providing high resistance to cuts and abrasion in oil/liquid applications. Its special palm coating enhances grip, while the inter-finger support ensures long-term use.

SanSeal 443464



EN 420

EN 388



4X42D



High Resistance



Maximum Comfort



Steel-Free



Liquid-Proof

Coating Nitrile

Coating Colour Blue/Black


Liner HPPE

Liner Colour Grey

Gauge 15G

Thickness 1,75 mm

Size 7-8-9-10-11



Check it Now



Metal Processing



Automotive



Press Operations



Handling Sharp-Edged Parts



Assembly Maintenance



Glass Handling



Petrochemical



Mining

General Properties

Double-layer 3/4 and fully coated nitrile work glove with high palm grip capability and abrasion resistance for oil/liquid applications.

SanSeal 442460



EN 420

EN 388



4121X



Moderate Resistance



Maximum Comfort



Steel-Free



Glass Fiber-Free



High Grip



Liquid-Proof

Coating Nitrile

Coating Colour Blue/Black

Liner Polyester

Liner Colour Grey

Gauge 15G

Thickness 1,40 mm

Size 7-8-9-10-11



Check it Now



Metal Processing



Automotive



Assembly Maintenance



Port Operations



Logistics



Mining



Construction



Agriculture

SanSeal 443460



EN 420

EN 388



4121X



Moderate Resistance



Maximum Comfort



Steel-Free



Glass Fiber Free



High Grip



Liquid-Proof

Coating Nitrile

Coating Colour Blue/Black

Liner Polyester

Liner Colour Grey

Gauge 15G

Thickness 1,40 mm

Size 7-8-9-10-11



Check it Now



Metal Processing



Automotive



Assembly Maintenance



Port Operations



Logistics



Mining



Construction



Agriculture

PU-Coated Precision Assembly Gloves

General Properties

Assembly gloves; light weight, higher fingertip sensitivity, thin structure and good fit for hands, perfect price / performance ratio.

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance, assembly of small parts.

SanFit 111220



- Lightweight
- Moderate Resistance
- Good Fit for Hands
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	White
Liner	Polyester
Liner Colour	White
Gauge	13G
Thickness	0,80 mm
Size	6,7,8,9,10,11



Check it Now

- Furniture
- Textile
- Plastic
- Pharmaceutical
- White Goods
- Automotive
- Transportation

SanFit 111330



- Lightweight
- Moderate Resistance
- Good Fit for Hands
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Polyester
Liner Colour	Black
Gauge	13G
Thickness	0,80 mm
Size	6,7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Logistics
- Furniture
- Textile
- Plastic

SanFit Series

PU-Coated Precision Assembly Gloves

General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance, assembly small parts.

SanFit 121220



- High Level of Comfort
- High Resistance
- Silicone-Free
- Good Fit for Hands
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	White
Liner	Nylon
Liner Colour	White
Gauge	13G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

- Furniture
- Textile
- Plastic
- Pharmaceutical
- White Goods
- Automotive
- Transportation

SanFit 121330



- High Level of Comfort
- High Resistance
- Silicone-Free
- Good Fit for Hands
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Nylon
Liner Colour	Black
Gauge	13G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviationspace - Aviation
- Logistics
- Furniture
- Textile
- Plastic

SanFit 121440



- High Level of Comfort
- High Resistance
- Silicone-Free
- Good Fit for Hands
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Grey
Liner	Nylon
Liner Colour	Grey
Gauge	13G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviationspace - Aviation
- Logistics
- Furniture
- Textile
- Plastic

PU-Coated Precision Assembly Gloves

General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, comfortable, fits adaptively to hands.

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance.

SanFit 161330



- High Level of Comfort
- Good Fit for Hands
- Moderate Resistance
- Silicone-Free
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Polyester & Spandex
Liner Colour	Black
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now

- Automotive
- Transportation
- White Goods
- Aviationspace - Aviation
- Light Manufacturing Industry
- Wind Energy
- Logistics
- Furniture
- Textile

General Properties

Working gloves; ultra-light weight, offering maximum fingertip sensitivity, easily tearable.

Areas of Usage

Light assembly works, working with small pieces and applications for which the fingertip sensitivity is very important.

SanFit 166330



- Ultra Thin
- Ultra Lightweight
- Easy Fragmentation
- Silicone-Free
- Low Resistance
- Good Fit for Hands
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Polyester & Spandex
Liner Colour	Black
Gauge	18G
Thickness	0,50mm
Size	6,7,8,9,10,11



Check it Now

- Automotive
- Transportation
- White Goods
- Aviationspace - Aviation
- Electronics
- Communication

SanFit Series

PU-Coated Precision Assembly Gloves

General Properties

Electrostatic discharge protection featured carbonlining, ESD-certified, touch screens compatible.


Areas of Usage

Assembly of electrical/electronic components, light assembly and production lines, ESD environments, assembly of small parts.

SanFit 721740



Coating	Polyurethane
Coating Colour	Grey
Liner	Carbon - Nylon & Spandex
Liner Colour	Blue & Black Melange
Gauge	18G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Uncoated

General Properties

Glove liner made of nylon yarn. Maximum mobility and breathability.

Areas of Usage

Surface inspection processes, general use, special applications.


SanFit 020200



Coating	Uncoated
Liner	Nylon
Liner Colour	White
Gauge	15G
Thickness	0,70 mm
Size	6,7,8,9,10



Check it Now



General Properties

It is produced by coating nitrile on a soft, cotton lining. It is resistant to liquid.

Areas of Usage

General handling, dry gardening works, construction and building works, general rough works.

NP01



EN 420

EN 388:2016



3X11A



Moderate Resistance



Liquid-Proof



High Level of Comfort

Coating Nitrile

Coating Type 3/4


Coating Colour Yellow, Blue

Liner Cotton

Liner Colour Ecru

Thickness 0,80 mm

Size 8,9,10



Check it Now



Heavy Industry



Mining



Agriculture



Construction

NP02



EN 420

EN 388:2016



3X11A



Moderate Resistance



Liquid-Proof



High Level of Comfort

Coating Nitrile

Coating Type Fully


Coating Colour Yellow, Blue

Liner Cotton

Liner Colour Ecru

Thickness 0,90 mm

Size 8,9,10



Check it Now



Heavy Industry



Mining



Agriculture



Construction

NP03



EN 420

EN 388:2016



4111A



High Resistance



Liquid-Proof



Steel-Free

Coating Nitrile

Coating Type Fully


Coating Colour Blue

Liner Cotton Jersey

Liner Colour White

Thickness 1,40 mm

Size 9,10,11



Check it Now



Metal Processing



Automotive



Press



Construction



Heavy Part Handling



Petrochemical



Woodworking



Waste Disposal



Personal Protective Equipment Regulation (EU) 2016/425

The PPE Regulation classifies personal protective equipment (PPE) into three categories based on risk levels:

Category I: PPE Protection Against Minor Risks

Includes gloves and sleeves designed to protect against minimal risks, such as superficial mechanical injuries and cleaning-related hazards. Manufacturers are allowed to self-test and certify their products.

Category II: PPE Protection Against Moderate Risks

Hand and arm protection designed to safeguard against cuts, abrasions, punctures, and tears. This category of products must undergo independent testing and be certified by an accredited notified body.

Once approved, the product will receive a CE marking from the notified body. In the EU, no PPE can be sold or used without the CE marking. The name and address of the notified body issuing the CE marking must be included in the user instructions provided with the product. Performance must be continuously monitored through testing.

Category III: PPE Protection Against Fatal or Irreversible Injuries

PPE in this category involves risks that can lead to very serious consequences, such as death or irreversible harm to health, including exposure to chemicals, hazardous biological substances, extreme temperatures, and cuts caused by chainsaws. PPE must undergo independent testing and certification in the same manner as Category II products. The quality assurance system used by the manufacturer must also be independently inspected, and the identification number of the notified body must appear next to the CE mark in the user instructions.

Continuous monitoring of performance and production processes should be carried out through product testing and factory inspections.

EN ISO 21420:2020



General Requirements for Protective Gloves

Most types of protective gloves must meet the following general requirements:

- Glove construction
- Ergonomics
- Dexterity
- Harmlessness
- Product marking and packaging information
- Sizing
- Water vapor transmission and absorption
- Electrostatic properties



EN 388:2016

Protection Against Mechanical Risks

The EN 388:2016 standard applies to protective gloves against mechanical risks. This standard is used to determine the capacity of certain types of gloves to provide protection against abrasion, cuts, tears, and punctures. It classifies and defines the resistance levels of gloves against these hazards.

- a.** Abrasion Resistance: Based on the number of cycles required to wear through the glove material.
- b.** Cut Resistance: Based on the number of cycles required to cut through the glove at a fixed speed.
- c.** Tear Resistance: Indicates the force required to tear the glove.
- d.** Puncture Resistance: Specifies the force needed to puncture the glove.
- e.** Cut Resistance (ISO 13997 Test Method) The force required to cut a sample using a specific cutting machine under defined conditions.
- f.** Impact Protection: Based on measured energy and force transmission when the glove is subjected to an impact load.

		EN388	
	Level		
Abrasion	1-4	←	4
Cut	1-5	←	5
Tear	1-4	←	4
Puncture	1-4	←	4
Cut (TDM-100 Test)	A-F	←	F
Impact Protection	X,F,P	←	P



EN 407:2004



EN 407:2004

Protection Against Thermal Hazards

Scope

This standard determines the level of protection a glove provides against heat and flames. It plays a crucial role in selecting gloves for workers exposed to various heat sources and flames. The heat and flame pictogram is accompanied by a six-digit performance rating, representing the glove's resistance levels under specific thermal conditions.

The 'Heat and Flame' symbol includes six performance criteria:

- a.** Resistance to Flammability (Performance Level: 0 – 4)
- b.** Contact Heat Resistance (Performance Level: 0 – 4)
- c.** Convective Heat Resistance (Performance Level: 0 – 4)
- d.** Radiant Heat Resistance (Performance Level: 0 – 4)
- e.** Resistance to Small Splashes of Molten Metal (Performance Level: 0 – 4)
- f.** Resistance to Large Splashes of Molten Metal (Performance Level: 0 – 4)

Glove Standards



EN 511

Protection Against Cold

Scope

This European standard regulates the manufacture and sale of protective gloves resistant to thermal cold, cold air, and water. It applies to all gloves designed to protect hands against convective and contact cold down to -50°C.

Gloves providing protection against cold are tested based on three performance criteria, with results displayed under the cold protection pictogram:

- a. Resistance to Convective Cold (Performance Level: 0 – 4)
- b. Resistance to Contact Cold (Performance Level: 0 – 4)
- c. Water Penetration Resistance (Performance Level: 0 or 1)

EN 374-2



EN 374-2

Protection Against Chemicals and/or Microorganisms

The EN 374-2 standard determines a glove's ability to protect against liquid and gas permeability. This is particularly important for users handling hazardous liquids or gases, as it helps assess whether the glove can effectively prevent substance penetration. A glove's permeability resistance plays a critical role in protecting the user's skin from potential hazards.

The permeation performance of gloves defines their resistance to chemicals over a specific period. Based on EN 374-1 and EN 374-2 standards, gloves are classified according to their permeability performance, indicating how long they can protect against a specific chemical.

The EN 374-4:2013 standard evaluates how long gloves can maintain their protective properties when exposed to chemical substances. This test measures the glove's resistance duration and its ability to retain protection over time. This information is essential in determining how frequently gloves should be replaced.

The EN ISO 374-5:2016 standard assesses a glove's ability to protect against microorganisms. It measures the glove's effectiveness in reducing the number of microorganisms on its surface and interior. This is particularly crucial for users exposed to biological hazards, as it indicates how well the glove can protect against potential infections.

Requirements

Permeation resistance (EN 374-2): The penetration time must be ≥ 30 minutes for at least six chemicals listed in the table (EN 16523-1).

Permeation resistance (EN 374-2): The penetration time must be ≥ 30 minutes for at least three chemicals listed in the table (EN 16523-1)

Permeation resistance (EN 374-2): The penetration time must be ≥ 10 minutes for at least one chemical listed in the table (EN 16523-1)

For gloves providing protection against bacteria and fungi.

For gloves providing protection against bacteria and fungi.

Marking

EN ISO 374-1/ Type A



EN ISO 374-1/ Type B



EN ISO 374-1/ Type C



EN ISO 374-5



EN ISO 374-5



EN 16350

**EN 16350****Test Standard for Electrostatic Properties**

The EN 16350 standard defines the requirements and test methods for the electrostatic properties of protective gloves. It outlines additional requirements for gloves worn in environments where flammable or explosive atmospheres are present or may occur. This standard also provides a performance, marking, and information test method for protective gloves designed to dissipate electrostatic energy and minimize explosion risks.

It ensures that gloves protect operators in hazardous and explosive environments by preventing electrostatic discharge and its consequences. To ensure that electrostatic charges do not accumulate on the glove and are effectively transferred to the rest of the clothing for dissipation, the glove must have a sufficient level of electrical conductivity.

According to this standard, the glove's vertical electrical resistance (its ability to prevent electrostatic charge movement) must be less than 10^8 ohms. The lower the resistance value, the more conductive the glove, and thus, the lower the risk for the operator.

Glove Size and Measurement Chart

Glove Size	Hand Circumference (mm)
6	152
7	178
8	203
9	229
10	254
11	279



Glove Coating Types

Polyurethane Coating

1. Polyurethane is a thin and breathable coating that is also used in synthetic leather production.
2. It can quickly dissipate heat from the hand, helping to reduce sweating.
3. It is used in tasks where high fingertip sensitivity is essential.

Foam Nitrile Coating

1. Foam nitrile coating is oil-resistant due to the nitrile it contains.
2. Its porous structure allows breathability and makes it easier to grip oily parts.
3. The relatively thick structure of foam nitrile coating enhances comfort when handling heavy parts, acts as a cushion for the hand, and reduces pressure force.

Nitrile Coating


1. Thanks to its non-porous coating structure, it prevents mineral oils, water, and certain chemicals from penetrating the glove. For this reason, this type of coating is preferred in wet and oily work environments.
2. It can be used in dry, lightly oiled, or oily work environments.

Double Coating (Double-Dipped Nitrile Coating)

1. The first layer prevents the penetration of oil and liquids, while the second layer enhances grip, making it easier to hold oily or wet parts without slipping.
2. Suitable for use in oily and wet work environments.

GAUGE (Knitting Tightness)

1. The gauge number represents the knitting density and indicates the number of stitches per inch on the glove.
2. As the gauge number increases, the knitting tightness also increases. Common gauge numbers include 7, 10, 13, 15, 18, and 21.
3. Thin and high-durability gloves can be produced using high-gauge knitting machines.

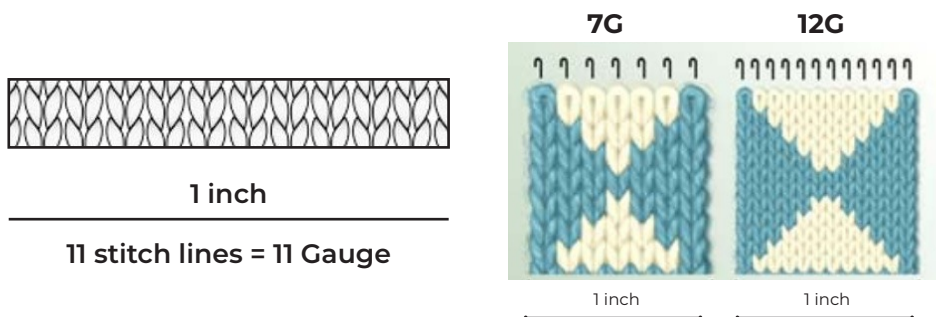

Yarns

Cotton	Natural, comfortable, and flexible
Polyester	Flexible, high durability, synthetic fiber
Polyamide (Nylon)	Flexible, high durability, highly comfortable synthetic fiber
HPPE/UHMWPE	Cut-resistant synthetic fiber
Aramid / P. Aramid	Cut- and heat-resistant synthetic fiber
Spandex	Used to ensure a snug fit of the glove. (Elastane)
Metal Fiber	Auxiliary fiber that enhances cut resistance and conductivity.
Glass Fiber	Auxiliary fiber that enhances cut resistance.
Carbon Fiber	Auxiliary fiber that enhances conductivity.

tebnalege®

Headquarter

A: TOSB 3. Cadde No: 23 Pk. 41420

Şekerpınar, Çayırova/Kocaeli

T: +90 262 679 1313

F: +90 262 679 1300

E: info@egebant.com.tr

www.egebant.com.tr



/egebant /egebantcom /Egebant /Egebant /EgebantComTr